

Changes for the Better

Mitsubishi iQ Platform
Programmable Controller
MELSEC-Q Series [QnU]



The next level in Q performance

Built-in Ethernet port CPU
now available!

MELSEC **Q** series

QnU

Mitsubishi Electric Corporation Nagoya Works is a factory certified for ISO14001 (standards for environmental management systems) and ISO9001 (standards for quality assurance management systems)




Unprecedented level of performance...

The next generation Q Series has arrived!

QnU model is the next generation MELSEC-Q Series. It is an ideal solution for users who want to increase productivity and processing speed of large-volume production information, which is critical for traceability. It is the fastest basic operation processing on the market* and can greatly improve performance of systems. Furthermore, the design concepts inherited from the Q Series make it more user-friendly and reliable. This new generation programmable controller will bring your systems to the next level

*As of April 2008

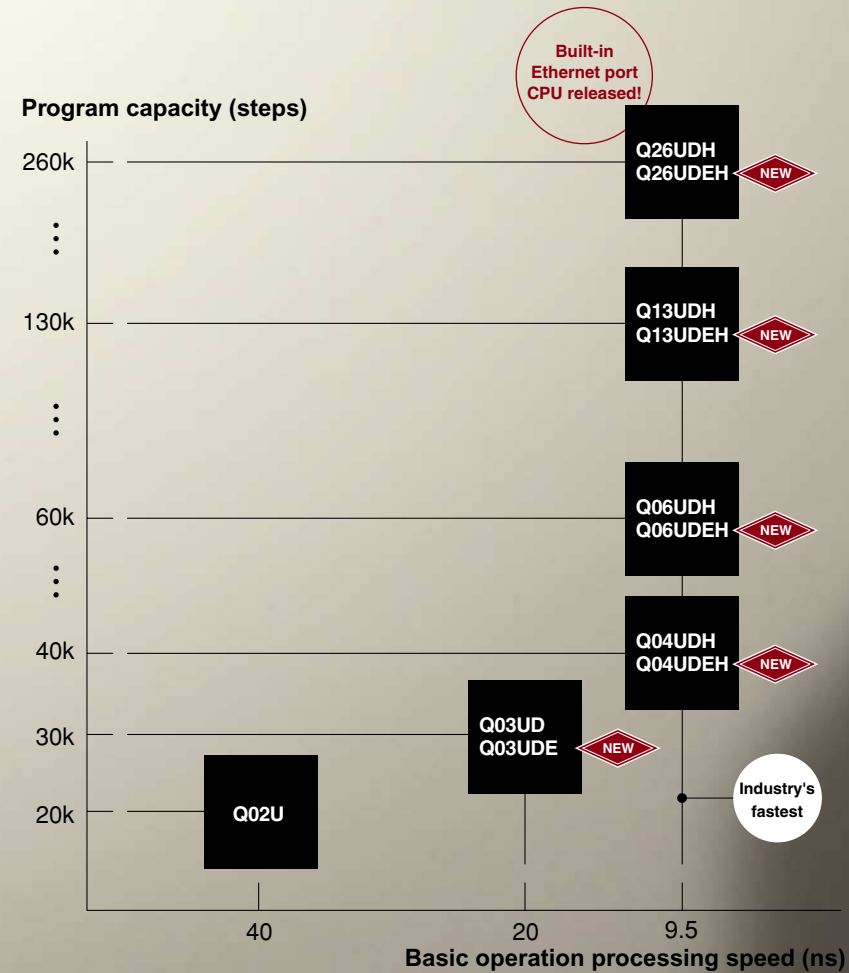

Current production requirements

- Minimizing operation cycle
- Corresponding to strict quality management
- Adopting more complex, larger-scale equipment
- Supporting increasingly large volume control/production management data
- Responding to short product life cycle
- Improving equipment uptime

Such needs at production site gave birth to this next generation programmable controller

Improved Productivity

More User - Friendly

Easy Maintenance



MELSEC **Q** series

QnU

Expanded possibility by networking...

Built-in Ethernet Port CPU Modules


Q03UDE/ Q04/ Q06/ Q13/ Q26UDEHCPU NEW



5 models added to lineup!

Connect to various devices according to applications


High-speed communication with external devices is available via Ethernet. According to application requirements, various devices can be connected.

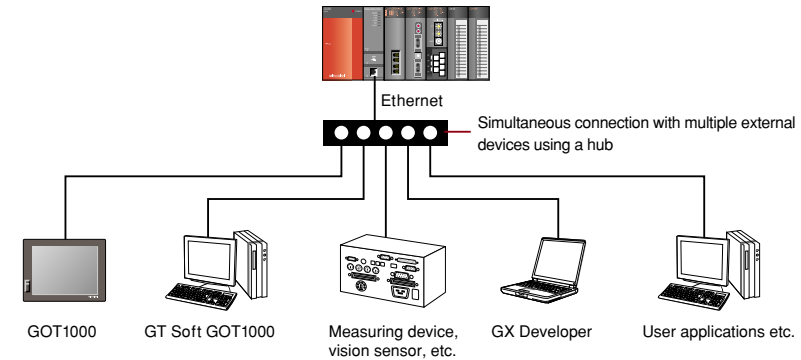

Connection with various devices

Seamless communication across all layers


The QnU model supports the high-speed, high-capacity CC-Link IE Controller Network to allow for massive data exchange. It can also communicate with MELSECNET/H, Ethernet, and CC-Link seamlessly beyond the network type and hierarchy. Each programmable controller on the network can be monitored/programmed by GX Developer connected via Ethernet.

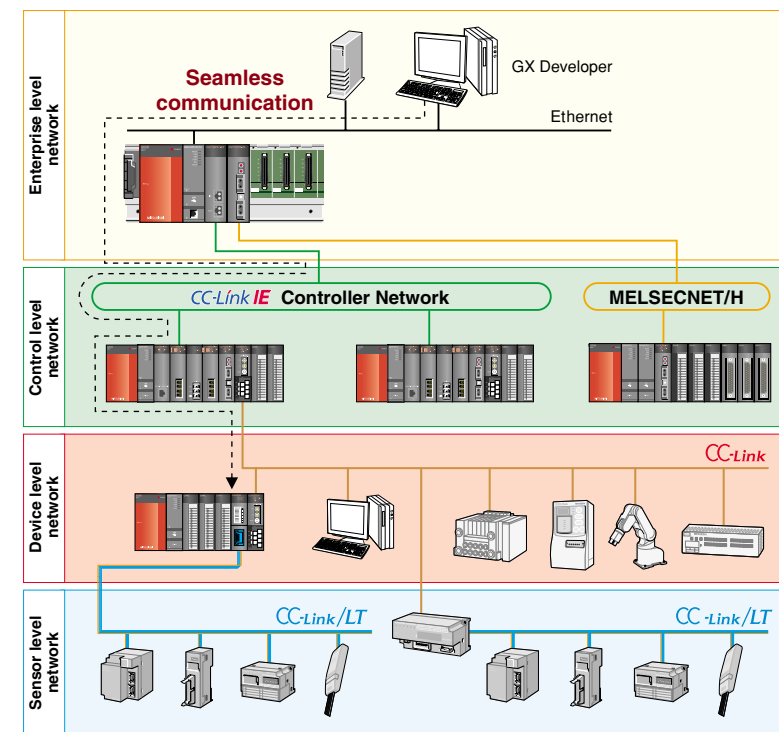

Access beyond hierarchy

Easy to connect to programming tool via Ethernet


IP address setting is not required to connect GX Developer (programming tool) to the CPU module directly (one-to-one connection). Also, the CPU module allows the use of either straight or cross cable. Ethernet thus realizes easy communication with the CPU module like USB connection, even operators who are not familiar with the network can easily connect it. (Patent pending)

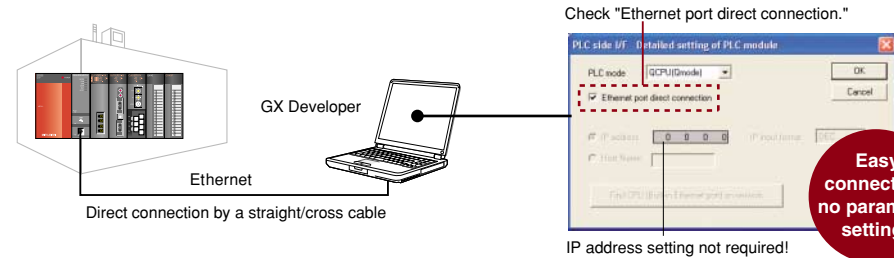

Easy connection, no parameter settings

Search and display a list of connected CPUs

Using an Ethernet hub, GX Developer can be simultaneously connected to multiple CPUs. The connected CPUs on the network can be searched and displayed in a list. By selecting a CPU from the list, it is connected easily even if the IP address is unknown, and the operating status can be checked.

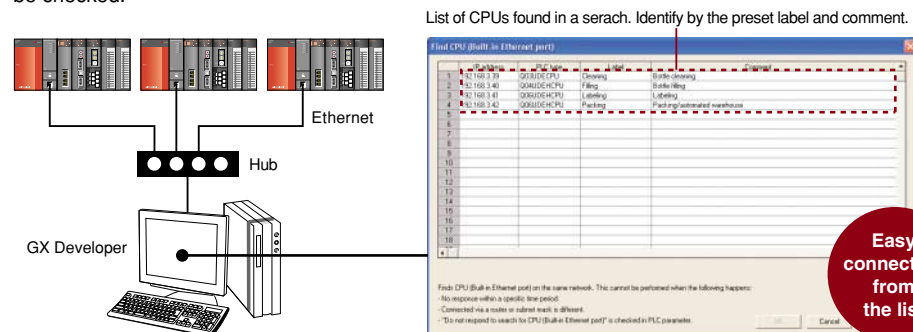


Easy connection from the list

Always provide accurate clock data

With the SNTP* clock synchronization function, clock synchronization, which is a bottleneck factor, is automatically performed. Accurate time of error occurrence can be grasped, enabling the user to easily confirm the multiple CPU related error occurrence timing.

* SNTP: Simple Network Time Protocol

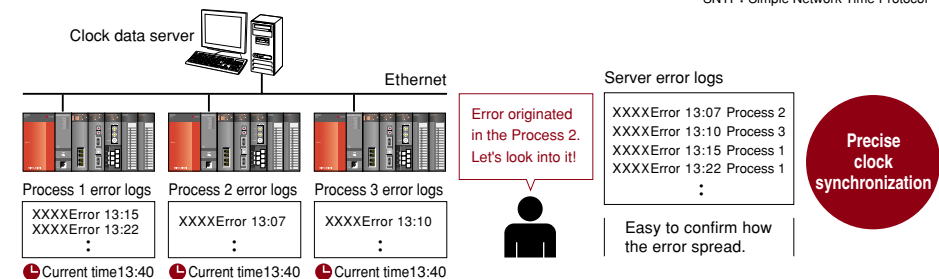



Precise clock synchronization

Improved Productivity



High-speed, high-accuracy machine control

By simultaneously processing a sequence program and multiple CPU high-speed communication (operation cycle of 0.88 ms), high-speed control is achieved. The multiple CPU high-speed communication cycle is synchronized with motion control, cutting down unnecessary control. Moreover, performance of motion control is two times faster than the previous model, allowing high-speed, high-accuracy machine control.

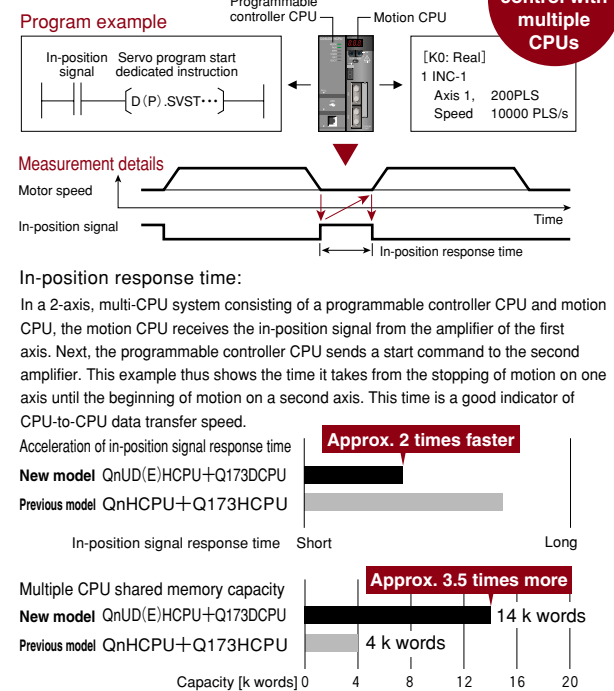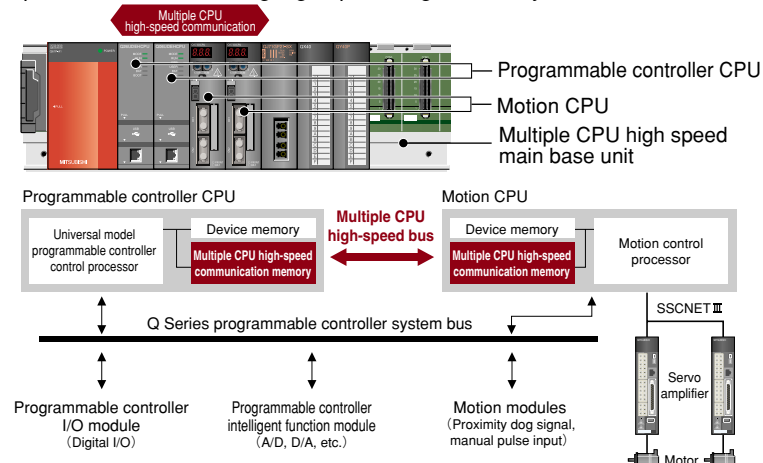


High-speed control with multiple CPUs

Improved production time with ultra-high-speed processing

To correspond with increasing demands for shortening production time of large-scale, complex systems, the new model offers the fastest basic operation performance* on the market: basic operation processing speed (LD) of 9.5 ns. This means scan time is reduced, improving production time and processing accuracy.

In addition, the programmable controller can realize high-speed control which was previously supported by micro computer boards only.

*As of April 2008

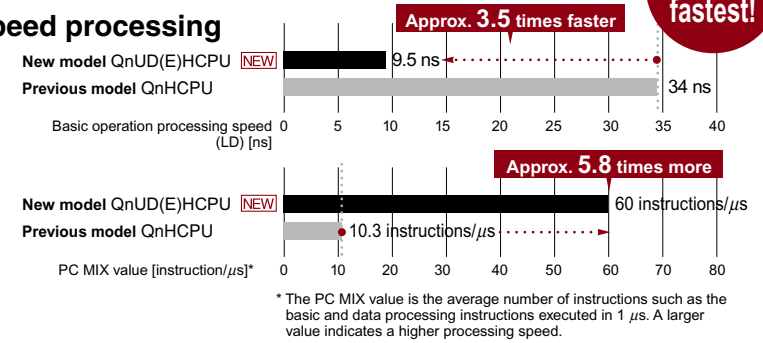


Industry's fastest!

High-speed, high-precision real data processing

Floating point addition instruction processing speed is greatly increased to 0.057 μs to support high-speed, high-precision operation processing of various production data. Also, double precision operation is added to reduce calculation errors when implementing complex equations.

The new model "QnUD(E)HCPU" includes Q04/06/13/26UDHCPU and Q04/06/13/26UDEHCPU (NEW); the previous model "QnHCPU" includes Q02/06/12/25HCPU.

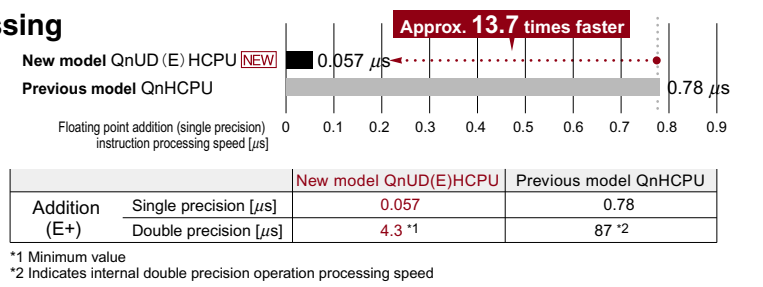


More User - Friendly

Programs structured into individual routines

The number of programs is increased to 124 (max.) to allow detailed program management by product, process, etc. This facilitates structuring programs into individual routines. Such structured programs can be highly utilized and enhance visibility. Also, standard ROM capacity is expanded to 4 MB (max.), enabling storage of label information of function block (FB) and device comments of sequence programs in CPU.

Increased program capacity

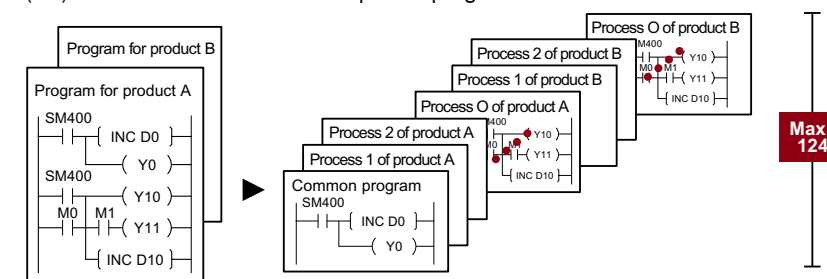


	Q02UCPU	Q03UDCPU	Q04UDHCPU	Q06UDHCPU	Q13UDHCPU	Q26UDHCPU
Program memory	20 k steps	30 k steps	40 k steps	60 k steps	130 k steps	260 k steps
No. of programs	64	124				
Standard ROM capacity (Flash ROM)	512 KB	1 MB		2 MB	4 MB	

Easy to handle large-volume data

The capacity of standard RAM and memory card, which can be used as file register, is increased to store larger amounts of production and quality data. With an 8 MB SRAM, a maximum of 4086 k words (about 4 times more than the previous model) can be used for file registers. Furthermore, because the index register is expanded to 32 bits, programming beyond 32 k words is possible, enabling use of the entire area of file register for indexing.

High-speed, large-volume data processing

To perform operation of structured (sequence) data efficiently, programming by indexing is necessary. Index register processing speed is also dramatically improved, which can shorten scan time when indexing is heavily used for sequence programs such as FOR to NEXT instruction.

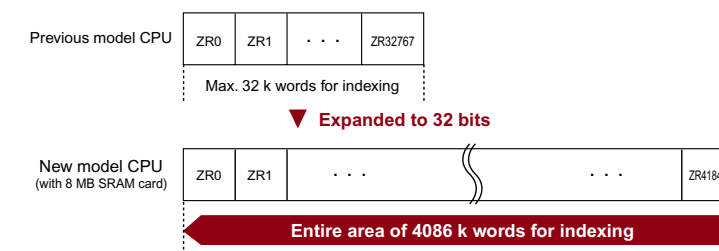

©Standard RAM capacity (file register capacity)

Q02UCPU	Q03UDCPU	Q04UDHCPU	Q06UDHCPU	Q13UDHCPU	Q26UDHCPU
128 KB (64 k words)	192 KB (96 k words)	256 KB (128 k words)	768 KB (384 k words)	1024 KB (512 k words)	1280 KB (640 k words)

©Memory card (SRAM)



Model	Q2MEM-1MBS	Q2MEM-2MBS	Q3MEM-4MBS	Q3MEM-8MBS
Capacity	1 MB	2 MB	4 MB	8 MB
File register capacity*	505 k words	1017 k words	2039 k words	4086 k words

* Maximum capacity when the memory card is used as file register


Shortened startup time with sampling trace function

The sampling trace function facilitates error analysis and program debugging timing verification, reducing equipment error analysis time and startup time. For a multiple CPU system, CPU-to-CPU data exchange timing can be also confirmed. The collected data can be not only viewed on GX Developer but also exported to a CSV file, allowing data analysis utilizing Excel.

Intuitive setting in Wizard format

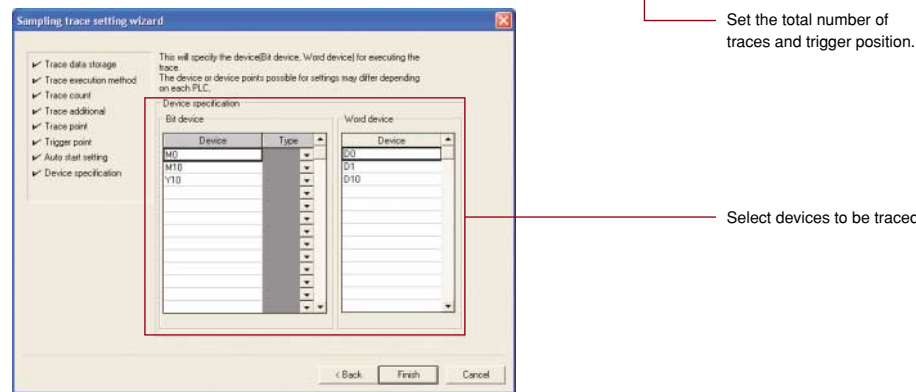
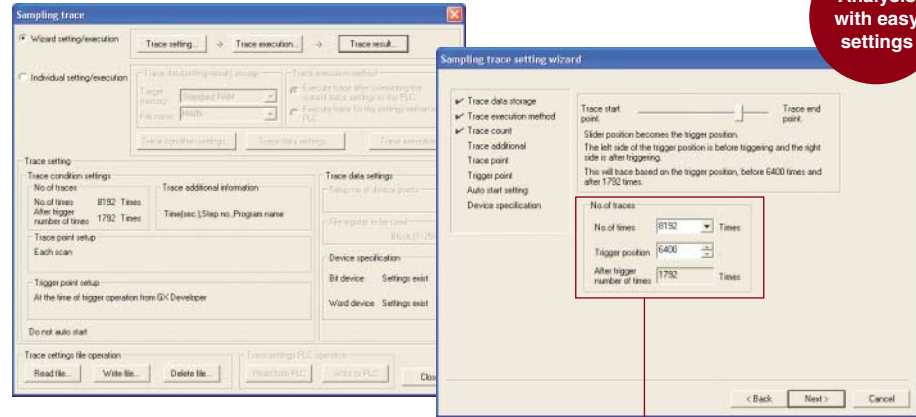


Trace result

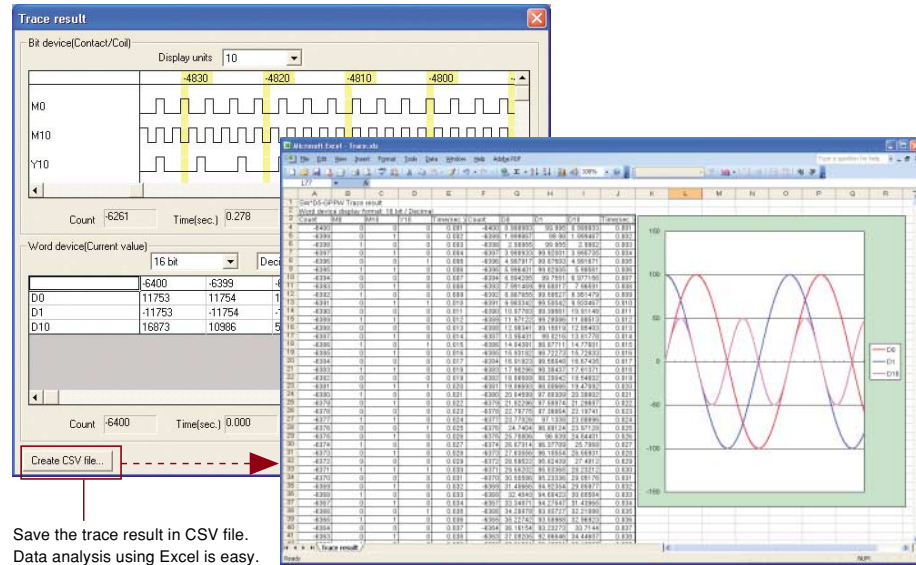

Simplified program debugging task Upgraded Function

The QnU model features the "Executorial conditioned device test" function, which allows the user to change the device value to the specified value at any step in the program. Previously, a program for device setting must be added to debug a specific ladder block. However, using this function, only the specified ladder block can be debugged without modifying the program. This eliminates the program modification time for debugging and simplifies the debugging task.

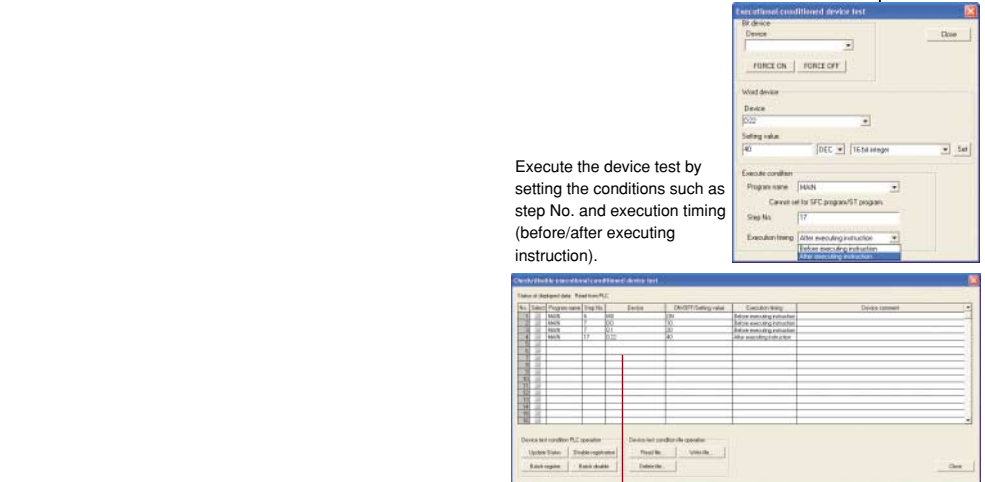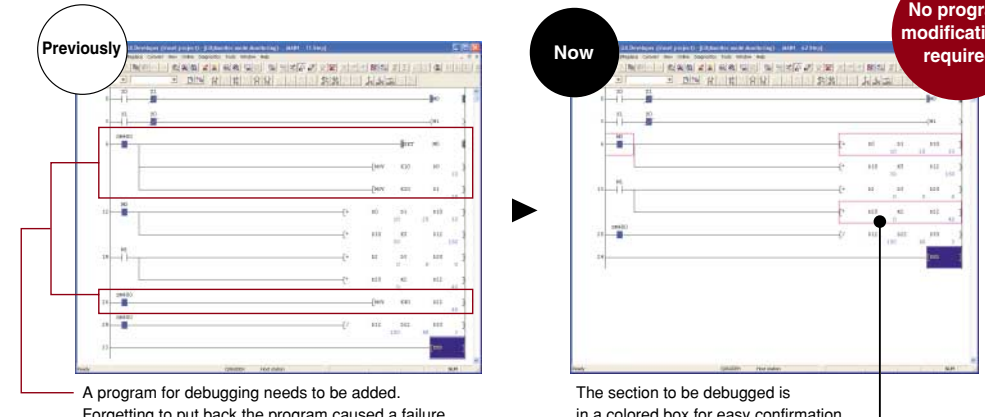


All sections to be tested are displayed in a list. Reading the registered conditions from the CPU and saving/reading the execution condition file are available.

Enhanced program readability by expanding bit devices

Upgraded Function

The bit devices M and B can be expanded up to 60 k points, improving program readability. (Previously up to 32 k points)

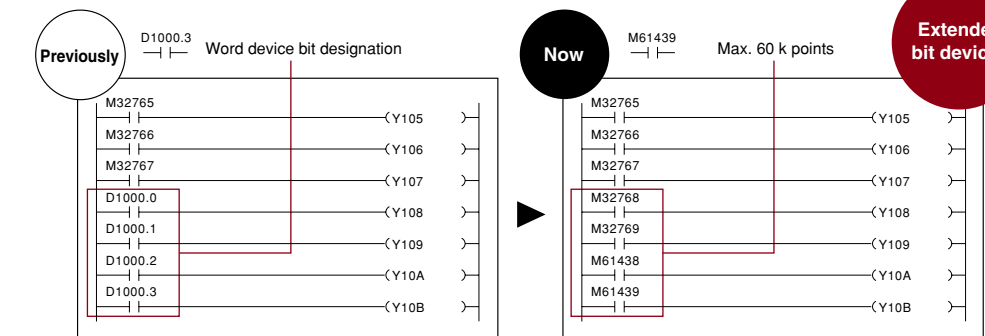


Confusing program because word device bit designation was used due to short on number of bit device points.

Clear program because bit devices can be used.

Highly compatible with standard Q Series


The standard Q Series modules can be used without modification. Common modules can be used for the existing system and new system, lowering maintenance costs.

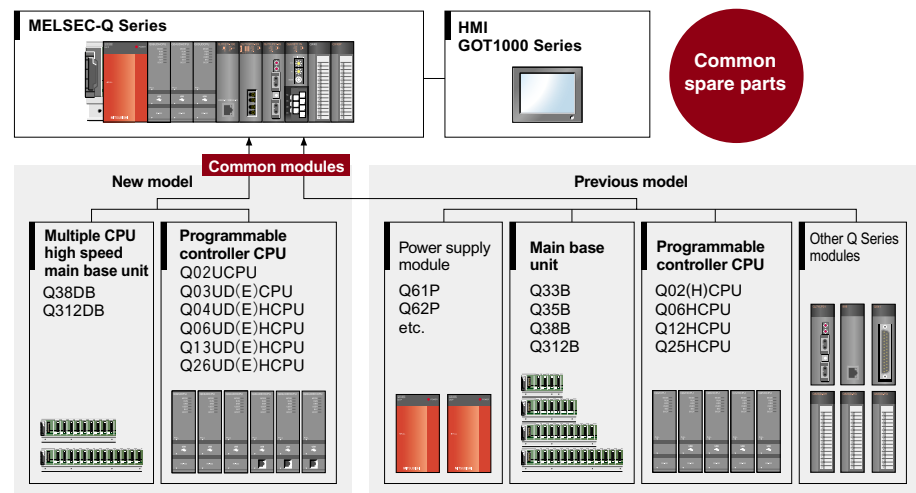

Easy Maintenance



Secure data even after prolonged storage

Program and parameter files are automatically saved in the Flash ROM, which does not require battery backup. This prevents data loss due to dead battery. This function improves battery life. Important information such as device data is also protected in case of dead battery. The data will be backed up in standard ROM, and the backup data automatically returns when power is turned ON.

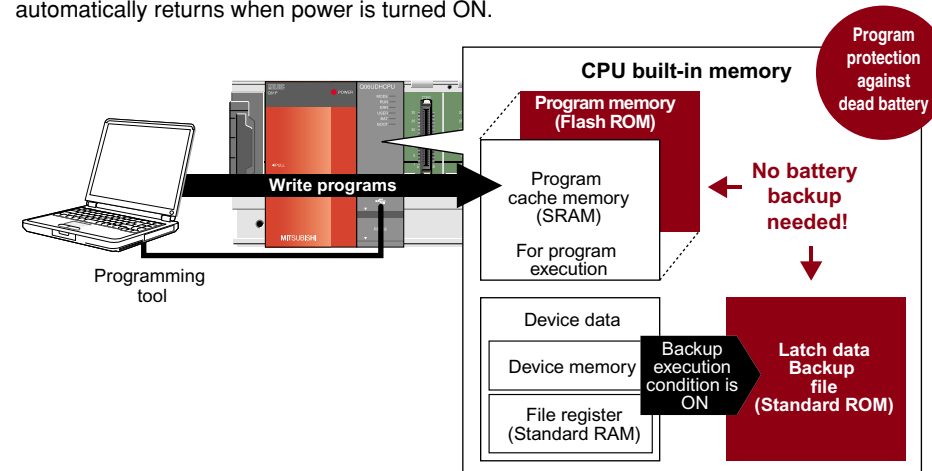

Simplified program transfer using just a memory card

Program modification of devices at the remote locations is simplified. Just install a memory card with programs and parameters into the CPU to transfer data. No programming tool (PC) is required. Modification time is reduced drastically.

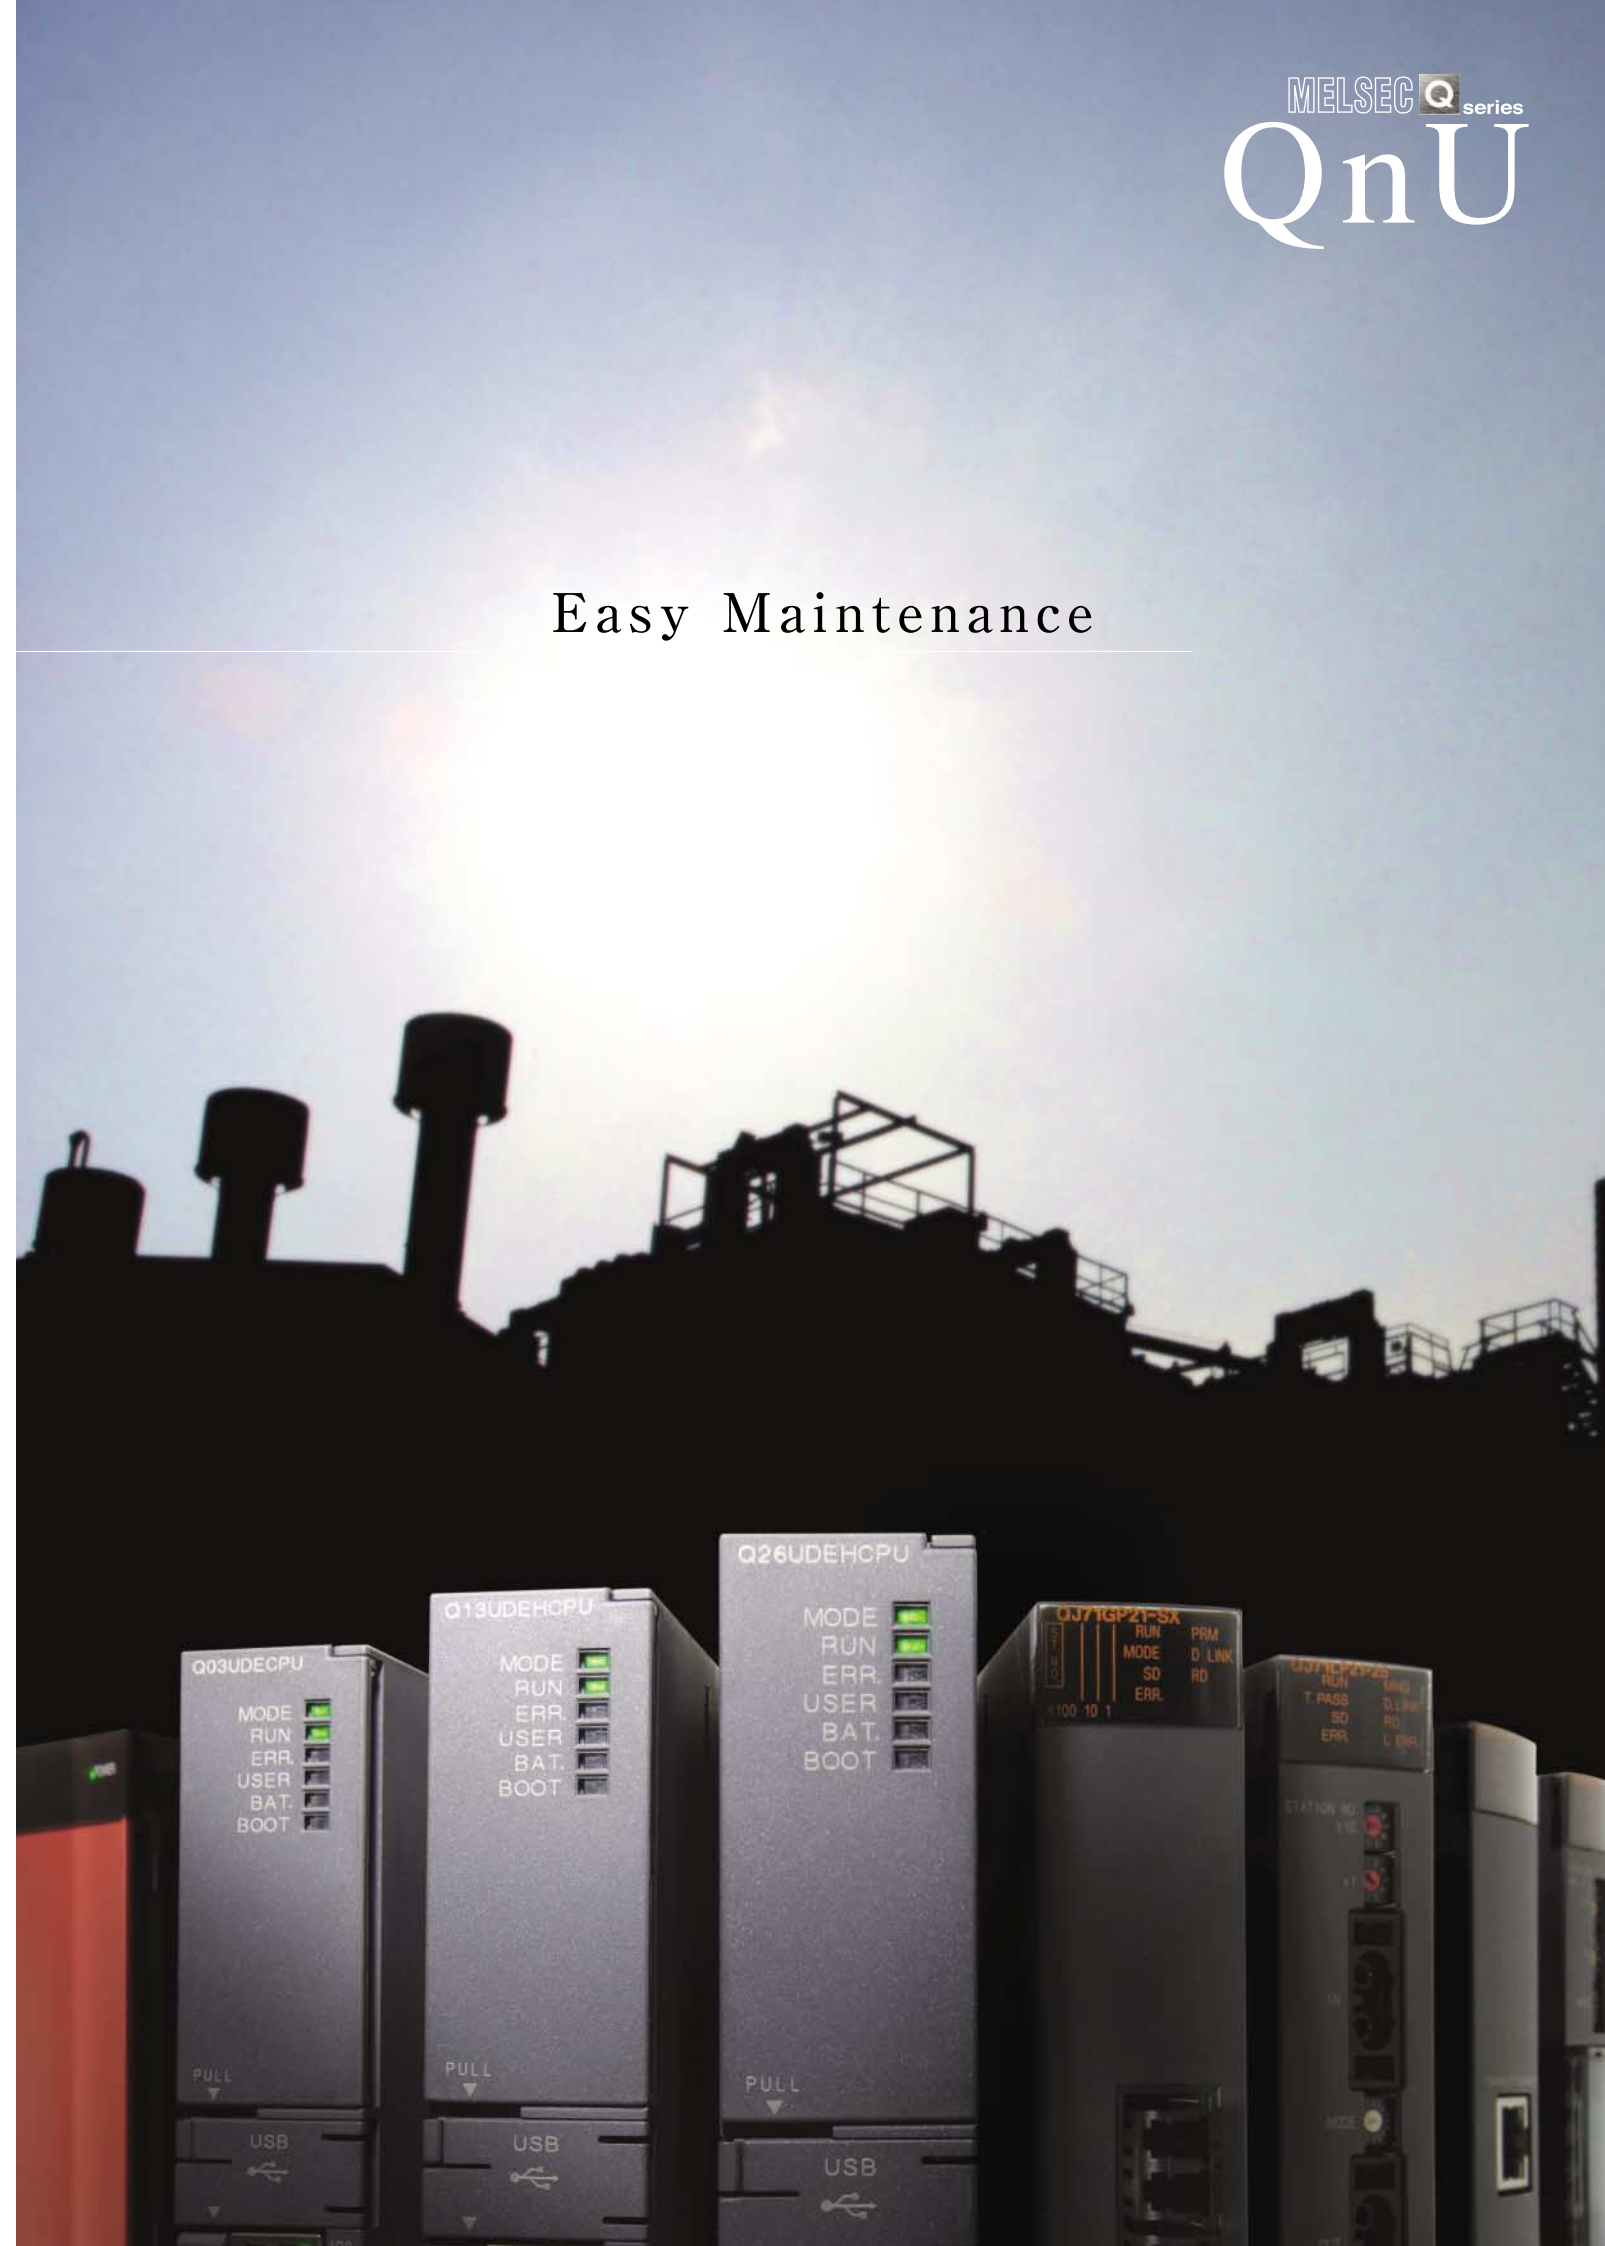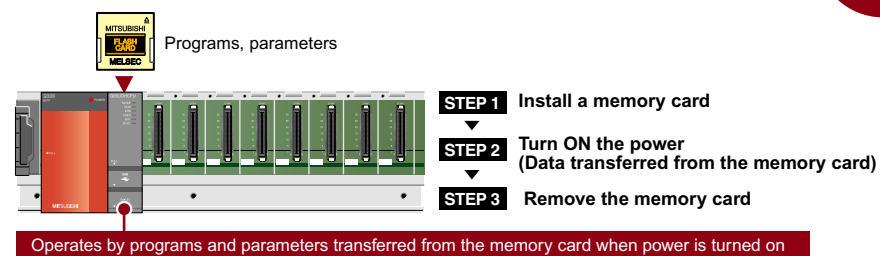

CPU Module Performance Specifications

Item	Q02UCPU	Q03UDCPU	Q04UDHCPU	Q06UDHCPU	Q13UDHCPU	Q26UDHCPU	
		Q03UDECPU <small>(NEW)</small>	Q04UDEHCPU <small>(NEW)</small>	Q06UDEHCPU <small>(NEW)</small>	Q13UDEHCPU <small>(NEW)</small>	Q26UDEHCPU <small>(NEW)</small>	
Control method	Sequence program control method						
I/O control mode	Refresh						
Program language (sequence control language)	Relay symbol language (ladder), logic symbolic language (list), MELSAP3 (SFC), MELSAP-L, and structured text (ST)						
Peripheral connection port	USB <small>(Note 6)</small>	Yes					
	RS-232	Yes	Q03UDCPU	Q04UDHCPU	Q06UDHCPU	Q13UDHCPU	Q26UDHCPU
Processing speed (sequence instruction) <small>(Note 1)</small>	Ethernet (100BASE-TX/10BASE-T)	No	Q03UDECPU	Q04UDEHCPU	Q06UDEHCPU	Q13UDEHCPU	Q26UDEHCPU
	LD instruction	0.04 μ s	0.02 μ s	0.0095 μ s			
	MOV instruction	0.08 μ s	0.04 μ s	0.019 μ s			
	PC MIX value (instruction/ μ s) <small>(Note 2)</small>	14	28	60			
	Floating point addition	0.18 μ s	0.12 μ s	0.057 μ s			
Total number of instructions <small>(Note 3)</small>	758	764					
Operation (floating point operation) instruction	Yes						
Character string processing instruction	Yes						
PID instruction	Yes						
Special function instruction (Trigonometric function, square root, exponential operation, etc.)	Yes						
Constant scan (Function for keeping regular scan time)	0.5 to 2000 ms (setting available in units of 0.5 ms)						
Program capacity	20 k steps	30 k steps	40 k steps	60 k steps	130 k steps	260 k steps	
Number of I/O device points [X/Y]	8192 points						
Number of I/O points [X/Y]	2048 points	4096 points					
Internal relay [M]	<small>(Note 4)</small>	8192 points					
Latch relay [L]		8192 points					
Link relay [B]		8192 points					
Timer [T]		2048 points					
Retentive timer [ST]		0 points					
Counter [C]		1024 points					
Data register [D]		12288 points					
Link register [W]		8192 points					
Annunciator [F]		2048 points					
Edge relay [V]		2048 points					
Link special relay [SB]	2048 points						
Link special register [SW]	2048 points						
File register [R, ZR]	65536 points <small>(Note 5)</small>	98304 points <small>(Note 5)</small>	131072 points <small>(Note 5)</small>	393216 points <small>(Note 5)</small>	524288 points <small>(Note 5)</small>	655360 points <small>(Note 5)</small>	
Step relay [S]	8192 points						
Index register/standard device register [Z]	20 points						
Index register [Z] (32-bit ZR indexing)	Max. 10 points (Z0 to Z18) (Index register [Z] is used in double words.)						
Pointer [P]	4096 points						
Interrupt pointer [I]	256 points						
Special relay [SM]	2048 points						
Special register [SD]	2048 points						
Function input [FX]	16 points						
Function output [FY]	16 points						
Function register [FD]	5 points						
Local device	Yes						
Device initial values	Yes						

Note 1) The processing speed is the same even when the device is indexed.

Note 2) The PC MIX value is the average number of instructions such as the basic and data processing instructions executed in 1 μ s. A larger value indicates a higher processing speed.

Note 3) Intelligent function module dedicated instructions are not included.

Note 4) Indicates the number of points in the default state. This can be changed with the parameter.

Note 5) Indicates the number of points when using the built-in memory (standard RAM). This can be expanded with the SRAM card or Flash card. (Writing from the program is not possible with the Flash card.) Up to 4184064 points can be used with the SRAM card.

Note 6) The USB port terminal is mini-B.

General Specifications

General specifications indicate the environmental specifications in which this product can be installed and operated. Unless otherwise specified, the general specifications apply to all products of the Q Series. Install and operate the Q Series products in the environment indicated in the general specifications.

Item	Specifications				
Operating ambient temperature	0 to 55°C				
Storage ambient temperature	-25 to 75°C <small>(Note 3)</small>				
Operating ambient humidity	5 to 95%RH <small>(Note 4)</small> , non-condensing				
Storage ambient humidity	5 to 95%RH <small>(Note 4)</small> , non-condensing				
Vibration resistance	Under intermittent vibration	Frequency	Acceleration	Amplitude	Sweep count 10 times each in X, Y, Z directions (for 80 min.)
	Conforms to JIS B 3502, IEC61131-2	5 to 9 Hz	-	3.5 mm (0.14 in.)	
		9 to 150 Hz	9.8 m/s ²	-	
	Under continuous vibration	Frequency	Acceleration	Amplitude	
		5 to 9 Hz	-	1.75 mm (0.069 in.)	
	9 to 150 Hz	4.9 m/s ²	-		
Shock resistance	Conforms to JIS B 3502, IEC61131-2 (147m/s ² , 3 times in each of 3 directions X, Y, Z)				
Operating atmosphere	No corrosive gases				
Operating altitude <small>(Note 5)</small>	2000 m (6562 ft.) or less				
Installation location	Inside control panel				
Overvoltage category <small>(Note 1)</small>	II or less				
Pollution degree <small>(Note 2)</small>	2 or less				
Equipment class	Class I				

Note 1) This indicates the section of the power supply to which the equipment is assumed to be connected between the public electrical power distribution network and the machinery within premises. Category II applies to equipment for which electrical power is supplied from fixed facilities. The surge voltage withstand level for up to the rated voltage of 300 V is 2500 V.

Note 2) This index indicates the degree to which conductive material is generated in the environment where the equipment is used.

In pollution degree 2, only non-conductive pollution occurs. However, a temporary conductivity caused by condensation is to be expected.

Note 3) The storage ambient temperature is -20 to 75°C if the system includes the AnS Series modules.

Note 4) The operating ambient humidity and storage ambient humidity are 10 to 90%RH if the system includes the AnS Series modules.

Note 5) Do not use or store the programmable controller under pressure higher than the atmospheric pressure of altitude 0 m. Doing so can cause a malfunction. When using the programmable controller under pressure, please consult your local Mitsubishi sales office or representative.

Module Combinations for Multiple CPU System

○ Possible
 ○ Possible (multiple CPU high-speed communication not available)
 × Impossible

Multiple CPU high speed main base unit (Q3□DB)

CPU 1	CPU 2 to 4	Universal model QCPU		High performance model QCPU	Motion CPU		Process CPU	PC CPU (Note 1)
		Q02UCPU	Q03UD(E)CPU Q04UD(E)HCPU Q06UD(E)HCPU Q13UD(E)HCPU Q26UD(E)HCPU		Q02(H)CPU Q06HCPU Q12HCPU Q25HCPU	New model		
				Q172DCPU Q173DCPU			Q172HCPU(-T) Q173HCPU(-T) Q172CPUN(-T) Q173CPUN(-T)	
Universal model QCPU	Q02UCPU (Note 2)	×	×	×	×	×	×	○ (Note 3)
High performance model QCPU	Q03UD(E)CPU Q04UD(E)HCPU Q06UD(E)HCPU Q13UD(E)HCPU Q26UD(E)HCPU	×	○	○	○	×	○	○ (Note 3)
	Q02(H)CPU Q06HCPU Q12HCPU Q25HCPU	×	○	○	×	×	○	○ (Note 3)

Main base unit other than Q3□DB

CPU 1	CPU 2 to 4	Universal model QCPU		High performance model QCPU	Motion CPU		Process CPU (Note 7)	PC CPU (Note 1,6)
		Q02UCPU	Q03UD(E)CPU Q04UD(E)HCPU Q06UD(E)HCPU Q13UD(E)HCPU Q26UD(E)HCPU		Q02(H)CPU Q06HCPU Q12HCPU Q25HCPU	New model		
				Q172DCPU Q173DCPU			Q172HCPU(-T) Q173HCPU(-T) Q172CPUN(-T) Q173CPUN(-T)	
Universal model QCPU	Q02UCPU	×	×	×	×	○ (Note 4)	×	○ (Note 3)
High performance model QCPU	Q03UD(E)CPU Q04UD(E)HCPU Q06UD(E)HCPU Q13UD(E)HCPU Q26UD(E)HCPU	×	○	○	×	×	○	○ (Note 3)
	Q02(H)CPU Q06HCPU Q12HCPU Q25HCPU	×	○	○	×	○ (Note 5)	○	○ (Note 3)

Note 1) For usable model name, version, etc., please contact your local Mitsubishi sales office or representative.
 Note 2) The Q02UCPU does not support multiple CPU high-speed communication.
 Note 3) Only one PC CPU can be used.
 Note 4) Only one motion CPU can be used.
 Note 5) Cannot be used together with the Q03UD(E), Q04UD(E)H, Q06UD(E)H, Q13UD(E)H, or Q26UD(E)HCPU.
 Note 6) The slim type main base unit (Q3□SB) and redundant power main base unit (Q38RB) cannot be used.
 Note 7) The slim type main base unit (Q3□SB) cannot be used.

Comparison between built-in Ethernet port CPU and Ethernet module (QJ71E71-100)


Function/performance	Built-in Ethernet port CPU QnUDE(H)CPU	Ethernet module QJ71E71-100
Communication speed	100 Mbps	100 Mbps
Communication with GX Developer	Yes	Yes
Communication with GOT	Yes	Yes
MC protocol communication	Yes (Note)	Yes
Fixed buffer communication	No	Yes
Random access buffer communication	No	Yes
Communication by data link instruction	No	Yes
FTP server function	Yes	Yes
E-mail function	No	Yes

Note) QnA compatible 3E frame device memory access commands only.

Ensuring an extensive global support network meeting diverse support for today's needs

Complying with international quality assurance standards.

All of Mitsubishi Electric's FA component products have acquired the international quality assurance "ISO9001" and environment management system standard "ISO14001" certification. Mitsubishi's products also comply with various safety standards, including UL Standards, and shipping standards.

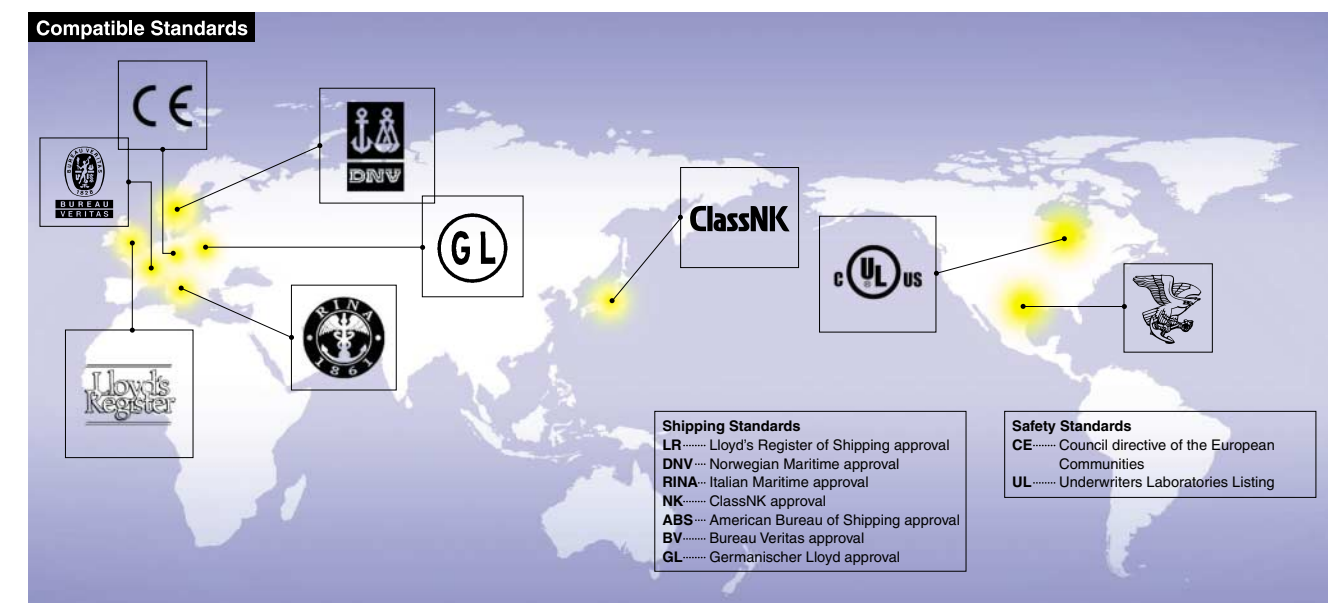

Global FA Centers

"Mitsubishi Global FA Centers" are located throughout North America, Europe, and Asia to develop products complying with international standards and to provide attentive services.

- North American FA Center**
 MITSUBISHI ELECTRIC AUTOMATION, INC.
 500 Corporate Woods Parkway, Vernon Hills, IL 60061, USA
 Tel: +1-847-478-2100 / Fax: +1-847-478-0327
 Area covered: North America, Mexico, Chile, Brazil
- Hong Kong FA Center**
 MITSUBISHI ELECTRIC AUTOMATION (HONG KONG) LTD.
 10/F, Manulife Tower, 169 Electric Road, North Point, Hong Kong
 Tel: +852-2887-8870 / Fax: +852-2887-7984
 Area covered: China
- Guangzhou FA Center**
 MITSUBISHI ELECTRIC AUTOMATION (SHANGHAI) LTD. GUANGZHOU OFFICE
 Rm. 1609, North Tower, The Hub Center, No. 1068, Xing Gang East Road, Haizhu District, Guangzhou 510335, China
 Tel: +86-20-8923-6713 / Fax: +86-20-8923-6715
 Area covered: China
- European FA Center**
 MITSUBISHI ELECTRIC EUROPE B.V. GERMAN BRANCH (Industrial Automation Division)
 Gothaer Strasse 8, D-40880 Ratingen, Germany
 Tel: +49-2102-486-0 / Fax: +49-2102-486-1120
 Area covered: Europe
- Shanghai FA Center**
 MITSUBISHI ELECTRIC AUTOMATION (SHANGHAI) LTD.
 4/F Zhi Fu Plaza, No. 80 Xin Chang Road, Shanghai 200003, China
 Tel: +86-21-2322-2862 / Fax: +86-21-2322-2868
 Area covered: China
- Taiwan FA Center**
 SETSUO ENTERPRISE CO., LTD.
 6F., No. 105 Wu-Kung 3rd RD, Wu-Ku Hsiang, Taipei Hsien, 248, Taiwan
 Tel: +886-2-2299-2499 / Fax: +886-2-2299-2509
 Area covered: Taiwan
- UK FA Center**
 MITSUBISHI ELECTRIC EUROPE B.V. UK BRANCH (Customer Technology Center)
 Travellers Lane, Hartfield, Hertfordshire, AL10 8XB, UK
 Tel: +44-1707-276100 / Fax: +44-1707-278992
 Area covered: UK, Ireland
- Tianjin FA Center**
 MITSUBISHI ELECTRIC AUTOMATION (SHANGHAI) LTD. TIANJIN OFFICE
 B-2-801/802, Youyi Building, No. 50 Youyi Road, Hexi District, Tianjin 300061, China
 Tel: +86-22-2813-1015 / Fax: +86-22-2813-1017
 Area covered: China
- ASEAN FA Center**
 MITSUBISHI ELECTRIC ASIA PTE, LTD.
 307 Alexandra Road #05-01/02
 Mitsubishi Electric Building, Singapore 159943
 Tel: +65-6470-2480 / Fax: +65-6476-7439
 Area covered: Southeast Asia, India
- Central and Eastern Europe FA Center**
 MITSUBISHI ELECTRIC EUROPE B.V. CZECH BRANCH
 Avenir Business Park, Radlicka 714/113a, 15800 Praha 5, Czech Republic
 Tel: +420-251-551-470 / Fax: 420-251-551-471
 Area covered: Czech Republic, Poland, Hungary, Slovakia
- Beijing FA Center**
 MITSUBISHI ELECTRIC AUTOMATION (SHANGHAI) LTD. BEIJING OFFICE
 9/F Office Tower 2, Henderson Center, 18 Jianguomennei Avenue, Dongcheng District, Beijing 100005, China
 Tel: +86-10-6518-8830 / Fax: +86-10-6518-8030
 Area covered: China
- Korean FA Center**
 MITSUBISHI ELECTRIC AUTOMATION KOREA CO., LTD.
 1480-6, Gayang-Dong, Gangseo-Ku, Seoul, 157-200, Korea
 Tel: +82-2-3660-9607 / Fax: +82-2-3664-0475
 Area covered: Korea
- Thailand FA Center**
 MITSUBISHI ELECTRIC AUTOMATION (THAILAND) CO., LTD.
 Bang-Chan Industrial Estate No. 111, Soi Serithai 54, T.Kannayao, A.Kannayao, Bangkok 10230, Thailand
 Tel: +66-02-906-3238 / Fax: +66-02-906-3239
 Area covered: Thailand

Product List

*Always refer to user's manuals for information on usable modules, restrictions, etc. before using.
 *Contact your local Mitsubishi sales office or representative for the latest information on the MELSOFT versions and compatible OS.

CPU, base, power supply

Product	Model	Outline	
CPU	Q02UCPU	No. of I/O points: 2048 points, no. of I/O device points: 8192 points, program capacity: 20 k steps, basic operation processing speed (LD instruction): 0.04 μs, program memory capacity: 80 KB, peripheral connection ports: USB and RS232, with memory card I/F	
	Q03UDCPU	No. of I/O points: 4096 points, no. of I/O device points: 8192 points, program capacity: 30 k steps, basic operation processing speed (LD instruction): 0.02 μs, program memory capacity: 120 KB, multiple CPU high-speed communication, peripheral connection ports: USB and RS232, with memory card I/F	
	Q04UDHCPU	No. of I/O points: 4096 points, no. of I/O device points: 8192 points, program capacity: 40 k steps, basic operation processing speed (LD instruction): 0.0095 μs, program memory capacity: 160 KB, multiple CPU high-speed communication, peripheral connection ports: USB and RS232, with memory card I/F	
	Q06UDHCPU	No. of I/O points: 4096 points, no. of I/O device points: 8192 points, program capacity: 60 k steps, basic operation processing speed (LD instruction): 0.0095 μs, program memory capacity: 240 KB, multiple CPU high-speed communication, peripheral connection ports: USB and RS232, with memory card I/F	
	Q13UDHCPU	No. of I/O points: 4096 points, no. of I/O device points: 8192 points, program capacity: 130 k steps, basic operation processing speed (LD instruction): 0.0095 μs, program memory capacity: 520 KB, multiple CPU high-speed communication, peripheral connection ports: USB and RS232, with memory card I/F	
	Q26UDHCPU	No. of I/O points: 4096 points, no. of I/O device points: 8192 points, program capacity: 260 k steps, basic operation processing speed (LD instruction): 0.0095 μs, program memory capacity: 1040 KB, multiple CPU high-speed communication, peripheral connection ports: USB and RS232, with memory card I/F	
	Q03UDECPU NEW	No. of I/O points: 4096 points, no. of I/O device points: 8192 points, program capacity: 30 k steps, basic operation processing speed (LD instruction): 0.02 μs, program memory capacity: 120 KB, multiple CPU high-speed communication, peripheral connection ports: USB and Ethernet, with memory card I/F	
	Q04UDEHCPU NEW	No. of I/O points: 4096 points, no. of I/O device points: 8192 points, program capacity: 40 k steps, basic operation processing speed (LD instruction): 0.0095 μs, program memory capacity: 160 KB, multiple CPU high-speed communication, peripheral connection ports: USB and Ethernet, with memory card I/F	
	Q06UDEHCPU NEW	No. of I/O points: 4096 points, no. of I/O device points: 8192 points, program capacity: 60 k steps, basic operation processing speed (LD instruction): 0.0095 μs, program memory capacity: 240 KB, multiple CPU high-speed communication, peripheral connection ports: USB and Ethernet, with memory card I/F	
	Q13UDEHCPU NEW	No. of I/O points: 4096 points, no. of I/O device points: 8192 points, program capacity: 130 k steps, basic operation processing speed (LD instruction): 0.0095 μs, program memory capacity: 520 KB, multiple CPU high-speed communication, peripheral connection ports: USB and Ethernet, with memory card I/F	
	Q26UDEHCPU NEW	No. of I/O points: 4096 points, no. of I/O device points: 8192 points, program capacity: 260 k steps, basic operation processing speed (LD instruction): 0.0095 μs, program memory capacity: 1040 KB, multiple CPU high-speed communication, peripheral connection ports: USB and Ethernet, with memory card I/F	
	Battery	Q6BAT	Replacement battery
Q7BAT		Replacement large-capacity battery	
Q7BAT-SET		Large-capacity battery with holder for mounting CPU	
Q8BAT		Replacement large-capacity battery module	
Q8BAT-SET		Large-capacity battery module with CPU connection cable	
Memory card		Q2MEM-1MBS	SRAM memory card, capacity: 1 MB
		Q2MEM-2MBS	SRAM memory card, capacity: 2 MB
		Q3MEM-4MBS	SRAM memory card, capacity: 4 MB
		Q3MEM-4MBS-SET	SRAM memory card with cover, capacity: 4 MB
		Q3MEM-8MBS	SRAM memory card, capacity: 8 MB
		Q3MEM-8MBS-SET	SRAM memory card with cover, capacity: 8 MB
		Q2MEM-2MBF	Linear Flash memory card, capacity: 2 MB
	Q2MEM-4MBF	Linear Flash memory card, capacity: 4 MB	
	Q2MEM-8MBA	ATA card, capacity: 8 MB	
	Q2MEM-16MBA	ATA card, capacity: 16 MB	
Q2MEM-32MBA	ATA card, capacity: 32 MB		
Memory card adapter	Q2MEM-ADP	Adapter for Q2MEM memory card's standard PCMCIA slot	
SRAM card battery	Q2MEM-BAT	Replacement battery for Q2MEM-1MBS and Q2MEM-2MBS	
	Q3MEM-BAT	Replacement battery for Q3MEM-4MBS and Q3MEM-8MBS	
Connection cable	QC30R2	RS-232 cable for connecting personal computer and CPU, 3 m (between mini-DIN6P and Dsub9P)	
Cable disconnection prevention holder	Q6HLD-R2	Holder for preventing RS-232 cable (programmable controller CPU connection) disconnection	
Base	Main base	Q33B	3 slots, 1 power supply module required, for Q Series modules
		Q35B	5 slots, 1 power supply module required, for Q Series modules
		Q38B	8 slots, 1 power supply module required, for Q Series modules
		Q312B	12 slots, 1 power supply module required, for Q Series modules
	Slim type main base	Q32SB	2 slots, 1 slim type power supply module required, for Q Series modules
		Q33SB	3 slots, 1 slim type power supply module required, for Q Series modules
		Q35SB	5 slots, 1 slim type power supply module required, for Q Series modules
Redundant power main base	Q38RB	8 slots, 2 redundant power supply modules required, for Q Series modules	

CPU, base, power supply

Product	Model	Outline	
Base	Multiple CPU high speed main base	Q38DB	8 slots, 1 power supply module required, for Q Series modules
		Q312DB	12 slots, 1 power supply module required, for Q Series modules
	Extension base	Q63B	3 slots, 1 power supply module required, for Q Series modules
		Q65B	5 slots, 1 power supply module required, for Q Series modules
		Q68B	8 slots, 1 power supply module required, for Q Series modules
		Q612B	12 slots, 1 power supply module required, for Q Series modules
		Q52B	2 slots, power supply module not required, for Q Series modules
		Q55B	5 slots, power supply module not required, for Q Series modules
	Redundant power extension base	Q68RB	8 slots, 2 redundant power supply modules required, for Q Series modules
	Extension cable	QC05B	0.45 m cable for connecting extension base unit
		QC06B	0.6 m cable for connecting extension base unit
		QC12B	1.2 m cable for connecting extension base unit
		QC30B	3 m cable for connecting extension base unit
		QC50B	5 m cable for connecting extension base unit
	Adapter	QC100B	10 m cable for connecting extension base unit
		Q6DIN1	DIN rail mounting adapter for Q38B, Q312B, Q68B, Q612B, Q38RB, Q68RB, Q65WRB, Q38DB, and Q312DB
	Adapter	Q6DIN2	DIN rail mounting adapter for Q35B, Q65B, and Q00JCPU
		Q6DIN3	DIN rail mounting adapter for Q32SB, Q33SB, Q35SB, Q33B, Q52B, Q55B, and Q63B
Q6DIN1A		DIN rail mounting adapter (with vibration-proofing bracket set) for Q3□B, Q5□B, Q6□B, Q38RB, Q68RB, and Q65WRB	
Blank cover	QG60	Blank cover for I/O slot	
Power supply	Q61P	Input voltage: 100 to 240 V AC, output voltage: 5 V DC, output current: 6 A	
	Q62P	Input voltage: 100 to 240 V AC, output voltage: 5/24 V DC, output current: 3/0.6 A	
	Q63P	Input voltage: 24 V DC, output voltage: 5 V DC, output current: 6 A	
	Q64PN (Note 8)	Input voltage: 100 to 240 V AC, output voltage: 5 V DC, output current: 8.5 A	
Slim type power supply	Q61SP	Input voltage: 100 to 240 V AC, output voltage: 5 V DC, output current: 2 A	
Redundant power supply	Q63RP	Input voltage: 24 V DC, output voltage: 5 V DC, output current: 8.5 A	
	Q64RP	Input voltage: 100 to 120/200 to 240 V AC, output voltage: 5 V DC, output current: 8.5 A	

I/O module

Product	Model	Outline	
AC	QX10	16 points, 100 to 120 V AC, 8 mA (100 V AC, 60 Hz)/7 mA (100 V AC, 50 Hz), response time: 20 ms, 16 points/common, 18-point terminal block	
	QX28	8 points, 100 to 240 V AC, 17 mA (200 V AC, 60 Hz)/14 mA (200 V AC, 50 Hz)/8 mA (100 V AC, 60 Hz)/7 mA (100 V AC, 50 Hz), response time: 20 ms, 8 points/common, 18-point terminal block	
DC (Positive common) (Note 1)	QX40	16 points, 24 V DC, 4 mA, response time: 1/5/10/20/70 ms, 16 points/common, positive common, 18-point terminal block	
	QX40-S1	16 points, 24 V DC, 6 mA, response time: 0.1/0.2/0.4/0.6/1 ms, 16 points/common, positive common, 18-point terminal block	
	QX41 (Note 2)	32 points, 24 V DC, 4 mA, response time: 1/5/10/20/70 ms, 32 points/common, positive common, 40-pin connector	
	QX41-S1 (Note 2)	32 points, 24 V DC, 4 mA, response time: 0.1/0.2/0.4/0.6/1 ms, 32 points/common, positive common, 40-pin connector	
	QX42 (Note 2)	64 points, 24 V DC, 4 mA, response time: 1/5/10/20/70 ms, 32 points/common, positive common, 40-pin connector	
	QX42-S1 (Note 2)	64 points, 24 V DC, 4 mA, response time: 0.1/0.2/0.4/0.6/1 ms, 32 points/common, positive common, 40-pin connector	
AC/DC (Note 1)	QX50	16 points, 48 V AC/DC, 4 mA, response time: 20 ms, 16 points/common, positive/negative common, 18-point terminal block	
DC sensor (Note 1)	QX70	16 points, 5/12 V DC, 1.2 mA (5 V DC)/3.3 mA (12 V DC), response time: 1/5/10/20/70 ms, 16 points/common, positive/negative common, 18-point terminal block	
	QX71	32 points, 5/12 V DC, 1.2 mA (5 V DC)/3.3 mA (12 V DC), response time: 1/5/10/20/70 ms, 32 points/common, positive/negative common, 40-pin connector	
	QX72	64 points, 5/12 V DC, 1.2 mA (5 V DC)/3.3 mA (12 V DC), response time: 1/5/10/20/70 ms, 32 points/common, positive/negative common, 40-pin connector	
DC (Negative common) (Note 1)	QX80	16 points, 24 V DC, 4 mA, response time: 1/5/10/20/70 ms, 16 points/common, negative common, 18-point terminal block	
	QX81 (Note 3)	32 points, 24 V DC, 4 mA, response time: 1/5/10/20/70 ms, 32 points/common, negative common, 37-pin D-sub connector	
	QX82 (Note 2)	64 points, 24 V DC, 4 mA, response time: 1/5/10/20/70 ms, 32 points/common, negative common, 40-pin connector	
	QX82-S1 (Note 2)	64 points, 24 V DC, 4 mA, response time: 0.1/0.2/0.4/0.6/1 ms, 32 points/common, negative common, 40-pin connector	
Relay	QY10	16 points, 24 V DC/240 V AC, 2 A/point, 8 A/common, response time: 12 ms, 16 points/common, 18-point terminal block	
	QY18A	8 points, 24 V DC/240 V AC, 2 A/point, response time: 12 ms, 18-point terminal block, all points independent	
Triac	QY22	16 points; 100 to 240 V AC; 0.6 A/point; 4.8 A/common; minimum load voltage/current: 24 V AC/100 mA, 100 to 240 V AC/25 mA; response time: 1 ms + 0.5 cycle, 16 points/common, 18-point terminal block, with surge suppressor	
	Transistor (Sink)	QY40P	16 points, 12 to 24 V DC, 0.1 A/point, 1.6 A/common, response time: 1 ms, 16 points/common, sink type, 18-point terminal block, with thermal and short-circuit protection and surge suppressor
		QY41P (Note 2)	32 points, 12 to 24 V DC, 0.1 A/point, 2 A/common, response time: 1 ms, 32 points/common, sink type, 40-pin connector, with thermal and short-circuit protection and surge suppressor
		QY42P (Note 2)	64 points, 12 to 24 V DC, 0.1 A/point, 2 A/common, response time: 1 ms, 32 points/common, sink type, 40-pin connector, with thermal and short-circuit protection and surge suppressor
		QY50	16 points, 12 to 24 V DC, 0.5 A/point, 4 A/common, response time: 1 ms, 16 points/common, sink type, 18-point terminal block, with surge suppressor and fuse

I/O module

Product	Model	Outline	
Output	Transistor (Independent)	QY68A	8 points, 5 to 24 V DC, 2 A/point, 8 A/module, response time: 10 ms, sink/source type, 18-point terminal block, with surge suppressor, all points independent
	TTL CMOS	QY70	16 points, 5 to 12 V DC, 16 mA/point, 256 mA/common, response time: 0.5 ms, 16 points/common, sink type, 18-point terminal block, with fuse
		QY71 (Note 2)	32 points, 5 to 12 V DC, 16 mA/point, 512 mA/common, response time: 0.5 ms, 32 points/common, sink type, 40-pin connector, with fuse
	Transistor (Source)	QY80	16 points, 12 to 24 V DC, 0.5 A/point, 4 A/common, response time: 1 ms, 16 points/common, source type, 18-point terminal block, with surge suppressor and fuse
		QY81P (Note 3)	32 points, 12 to 24 V DC, 0.1 A/point, 2 A/common, response time: 1 ms, 32 points/common, source type, 37-pin D-sub connector, with thermal and short-circuit protection and surge suppressor
I/O	DC input/transistor output	QH42P (Note 2)	Input: 32 points, 24 V DC, 4 mA, response time: 1/5/10/20/70 ms, 32 points/common, positive common; output: 32 points, 12 to 24 V DC, 0.1 A/point, 2 A/common, response time: 1 ms, 32 points/common, sink type; 40-pin connector, with thermal and short-circuit protection and surge suppressor
		QX48Y57	Input: 8 points, 24 V DC, 4 mA, response time: 1/5/10/20/70 ms, 8 points/common, positive common; output: 7 points, 12 to 24 V DC, 0.5 A/point, 2 A/common, response time: 1 ms, 7 points/common, sink type; 18-point terminal block, with surge suppressor and fuse
		QX41Y41P (Note 2)	Input: 32 points, 24 V DC, 4 mA, response time: 1/5/10/20/70 ms, 32 points/common, positive common; output: 32 points, 12 to 24 V DC, 0.1 A/point, 2 A/common, response time: 1 ms, 32 points/common, sink type; 40-pin connector, with thermal and short-circuit protection and surge suppressor
Interrupt module	QI60	16 points, 24 V DC, 4 mA, response time: 0.1/0.2/0.4/0.6/1 ms, 16 points/common, 18-point terminal block	
Connector	A6CON1	40-pin connector, soldering type	
	A6CON2	40-pin connector, crimp-contact type	
	A6CON3	40-pin connector, IDC for flat cables	
	A6CON4	40-pin connector, soldering type (cable connectable in bidirection)	
	A6CON1E	37-pin D-sub connector, soldering type	
	A6CON2E	37-pin D-sub connector, crimp-contact type	
	A6CON3E	37-pin D-sub connector, IDC for flat cables	
Spring clamp terminal block	Q6TE-18S	For 16-point I/O modules, 0.3 to 1.5 mm ² (22 to 16 AWG)	
Terminal block adapter	Q6TA32	For 32-point I/O modules, 0.5 mm ² (20 AWG)	
	Q6TA32-TOL	Q6TA32 dedicated tool	
Connector/terminal block conversion module	A6TBXY36	For positive common input modules and sink output modules (standard type)	
	A6TBXY54	For positive common input modules and sink output modules (2-wire type)	
	A6TBX70	For positive common input modules (3-wire type)	
	A6TBX36-E	For negative common input modules (standard type)	
	A6TBX54-E	For negative common input modules (2-wire type)	
	A6TBX70-E	For negative common input modules (3-wire type)	
	A6TBY36-E	For source output modules (standard type)	
	A6TBY54-E	For source output modules (2-wire type)	
	Cable	AC05TB	For A6TBXY36, A6TBXY54, and A6TBX70 (positive common/sink type); 0.5 m
		AC10TB	For A6TBXY36, A6TBXY54, and A6TBX70 (positive common/sink type); 1 m
		AC20TB	For A6TBXY36, A6TBXY54, and A6TBX70 (positive common/sink type); 2 m
		AC30TB	For A6TBXY36, A6TBXY54, and A6TBX70 (positive common/sink type); 3 m
		AC50TB	For A6TBXY36, A6TBXY54, and A6TBX70 (positive common/sink type); 5 m
		AC80TB	For A6TBXY36, A6TBXY54, and A6TBX70 (positive common/sink type); 8 m *Common current 0.5 A or lower
		AC100TB	For A6TBXY36, A6TBXY54, and A6TBX70 (positive common/sink type); 10 m *Common current 0.5 A or lower
		AC05TB-E	For A6TBX36-E, A6TBY36-E, A6TBX54-E, A6TBY54-E, and A6TBX70-E (negative common/source type); 0.5 m
		AC10TB-E	For A6TBX36-E, A6TBY36-E, A6TBX54-E, A6TBY54-E, and A6TBX70-E (negative common/source type); 1 m
AC20TB-E		For A6TBX36-E, A6TBY36-E, A6TBX54-E, A6TBY54-E, and A6TBX70-E (negative common/source type); 2 m	
AC30TB-E	For A6TBX36-E, A6TBY36-E, A6TBX54-E, A6TBY54-E, and A6TBX70-E (negative common/source type); 3 m		
AC50TB-E	For A6TBX36-E, A6TBY36-E, A6TBX54-E, A6TBY54-E, and A6TBX70-E (negative common/source type); 5 m		
Relay terminal module	A6TE2-16SRN	For 40-pin connector 24 V DC transistor output modules (sink type)	
Cable	AC06TE	For A6TE2-16SRN, 0.6 m	
	AC10TE	For A6TE2-16SRN, 1 m	
	AC30TE	For A6TE2-16SRN, 3 m	
	AC50TE	For A6TE2-16SRN, 5 m	
	AC100TE	For A6TE2-16SRN, 10 m	

Analog I/O module

Product	Model	Outline		
Analog input	Voltage input	Q68ADV	8 channels; input: -10 to 10 V DC; output (resolution): 0 to 4000, -4000 to 4000, 0 to 12000, -12000 to 12000, 0 to 16000, -16000 to 16000; conversion speed: 80 μs/channel; 18-point terminal block	
	Current input	Q62AD-DGH	2 channels; input: 4 to 20 mA DC; output (resolution): 0 to 32000, 0 to 64000; conversion speed: 10 ms/2 channels; 18-point terminal block; channel isolated; supplies power to 2-wire transmitter	
		Q66AD-DG (Note 5)	6 channels; input: 4 to 20 mA DC (when 2-wire transmitter is connected), 0 to 20 mA DC; output (resolution): 0 to 4000, 0 to 12000; conversion speed: 10 ms/channel; 40-pin connector; channel isolated; supplies power to 2-wire transmitter	
		Q68ADI	8 channels; input: 0 to 20 mA DC; output (resolution): 0 to 4000, -4000 to 4000, 0 to 12000, -12000 to 12000, 0 to 16000, -16000 to 16000; conversion speed: 80 μs/channel; 18-point terminal block	
	Voltage/current input	Q64AD	4 channels; input: -10 to 10 V DC, 0 to 20 mA DC; output (resolution): 0 to 4000, -4000 to 4000, 0 to 12000, -12000 to 12000, 0 to 16000, -16000 to 16000; conversion speed: 80 μs/channel; 18-point terminal block	
		Q64AD-GH	4 channels; input: -10 to 10 V DC, 0 to 20 mA DC; output (resolution): 0 to 32000, -32000 to 32000, 0 to 64000, -64000 to 64000; conversion speed: 10 ms/4 channels; 18-point terminal block, channel isolated	
		Q68AD-G (Note 5)	8 channels; input: -10 to 10 V DC, 0 to 20 mA DC; output (resolution): 0 to 4000, -4000 to 4000, 0 to 12000, -12000 to 12000, 0 to 16000, -16000 to 16000; conversion speed: 10 ms/channel; 40-pin connector, channel isolated	
	Analog output	Voltage output	Q68DAVN	8 channels; input (resolution): 0 to 4000, -4000 to 4000, 0 to 12000, -12000 to 12000, -16000 to 16000; output: -10 to 10 V DC; conversion speed: 80 μs/channel; 18-point terminal block, transformer isolation between power supply and output
		Current output	Q68DAIN	8 channels; input (resolution): 0 to 4000, -4000 to 4000, 0 to 12000, -12000 to 12000; output: 0 to 20 mA DC; conversion speed: 80 μs/channel; 18-point terminal block, transformer isolation between power supply and output
		Voltage/current output	Q62DAN	2 channels; input (resolution): 0 to 4000, -4000 to 4000, 0 to 12000, -12000 to 12000, -16000 to 16000; output: -10 to 10 V DC, 0 to 20 mA DC; conversion speed: 80 μs/channel; 18-point terminal block, transformer isolation between power supply and output
Q62DA-FG			2 channels; input (resolution): 0 to 12000, -12000 to 12000, -16000 to 16000; output: -12 to 12 V DC, 0 to 22 mA DC; conversion speed: 10 ms/2 channels; 18-point terminal block; channel isolated	
Q64DAN			4 channels; input (resolution): 0 to 4000, -4000 to 4000, 0 to 12000, -12000 to 12000, -16000 to 16000; output: -10 to 10 V DC, 0 to 20 mA DC; conversion speed: 80 μs/channel; 18-point terminal block; transformer isolation between power supply and output	
Q66DA-G (Note 5)			6 channels; input (resolution): 0 to 4000, -4000 to 4000, 0 to 12000, -12000 to 12000, -16000 to 16000; output: -12 to 12 V DC, 0 to 22 mA DC; conversion speed: 6 ms/channel; 40-pin connector; channel isolated	
Temperature input			RTD	Q64RD
	Q64RD-G	4 channels, RTD (Pt100 [JIS C1604-1997, IEC 751 1983], JPt100 [JIS C1604-1981], Ni100 [DIN43760 1987]), conversion speed: 40 ms/channel, 18-point terminal block, channel isolated		
	Q68RD3-G NEW	8 channels, RTD (3-wire type, Pt100 [JIS C1604-1997, IEC 751 1983], JPt100 [JIS C1604-1981], Ni100 [DIN43760 1987]), conversion speed: 320 ms/channel, 40-pin connector, channel isolated		
	Thermocouple	Q64TD	4 channels, thermocouple (JIS C1602-1995), conversion speed: 40 ms/channel, 18-point terminal block	
		Q64TDV-GH	4 channels, thermocouple (JIS C1602-1995), micro voltage (-100 to 100 mV), conversion speed: sampling cycle x 3, sampling cycle: 20 ms/channel, 18-point terminal block	
		Q68TD-G-H01 (Note 5, 7)	8 channels, thermocouple (JIS C1602-1995, IEC 60584-1 [1995], IEC 60584-2 [1982]), conversion speed: 320 ms/8 channels, 40-pin connector	
Temperature control	Platinum RTD	Q64TCRT	4 channels, platinum RTD (Pt100, JPt100), no heater disconnection detection, sampling cycle: 0.5 s/4 channels, 18-point terminal block	
		Q64TCRTBW	4 channels, platinum RTD (Pt100, JPt100), with heater disconnection detection, sampling cycle: 0.5 s/4 channels, two 18-point terminal blocks	
	Thermocouple	Q64CTT	4 channels, thermocouple (K, J, T, B, S, E, R, N, U, L, PLII, W5Re/W26Re), no heater disconnection detection, sampling cycle: 0.5 s/4 channels, 18-point terminal block	
		Q64CTTBW	4 channels, thermocouple (K, J, T, B, S, E, R, N, U, L, PLII, W5Re/W26Re), with heater disconnection detection, sampling cycle: 0.5 s/4 channels, two 18-point terminal blocks	
Loop control	Q62HLC	2 channels, input: thermocouple/micro voltage/voltage/current, conversion speed (input): 25 ms/2 channels, sampling cycle: 25 ms/2 channels; output: 4 to 20 mA DC, conversion speed (output): 25 ms/2 channels; 18-point terminal block, with 5 PID control modes		

Pulse I/O and positioning module

Product	Model	Outline
Channel isolated pulse input	QD60P8-G	8 channels, 30 kpps/10 kpps/1 kpps/ 100 pps/ 50 pps/ 10 pps/ 1 pps/0.1 pps, count input signal: 5/12 to 24 V DC
High-speed counter	QD62 (Note 2)	2 channels; 200/100/10 kpps; count input signal: 5/12/24 V DC; external input: 5/12/24 V DC; coincidence output: transistor (sink), 12/24 V DC, 0.5 A/point, 2 A/common; 40-pin connector
	QD62D (Note 2)	2 channels; 500/200/100/10 kpps; count input signal: EIA standards RS-422-A (differential line driver), external input: 5/12/24 V DC; coincidence output: transistor (sink), 12/24 V DC, 0.5 A/point, 2 A/common; 40-pin connector
	QD62E (Note 2)	2 channels; 200/100/10 kpps; count input signal: 5/12/24 V DC; external input: 5/12/24 V DC; coincidence output: transistor (source), 12/24 V DC, 0.1 A/point, 0.4 A/common; 40-pin connector
	QD63P6 (Note 4)	6 channels, 200/100/10 kpps, count input signal: 5 V DC, 40-pin connector
	QD64D2 (Note 4)	2 channels; 4 Mpps; count input signal: EIA standards RS-422-A (differential line driver); external input: 24 V DC; coincidence output: transistor (sink), 12/24 V DC, 0.5 A/point, 2 A/common; 40-pin connector

Pulse I/O and positioning module

Product	Model	Outline	
Positioning	Open collector output (Note 4)	QD75P1	1 axis; control unit: mm, inch, degree, pulse; no. of positioning data: 600/axis; max. output pulse: 200 kpps; 40-pin connector
		QD75P2	2 axes; 2-axis linear interpolation, 2-axis circular interpolation; control unit: mm, inch, degree, pulse; no. of positioning data: 600/axis; max. output pulse: 200 kpps; 40-pin connector
		QD75P4	4 axes; 2-/3-/4-axis linear interpolation, 2-axis circular interpolation; control unit: mm, inch, degree, pulse; no. of positioning data: 600/axis; max. output pulse: 200 kpps; 40-pin connector
		QD70P4	4 axes, control unit: pulse, no. of positioning data: 10/axis, max. output pulse: 200 kpps, 40-pin connector
		QD70P8	8 axes, control unit: pulse, no. of positioning data: 10/axis, max. output pulse: 200 kpps, 40-pin connector
	Differential output (Note 4)	QD75D1	1 axis; control unit: mm, inch, degree, pulse; no. of positioning data: 600/axis; max. output pulse: 1 Mpps; 40-pin connector
		QD75D2	2 axes; 2-axis linear interpolation, 2-axis circular interpolation; control unit: mm, inch, degree, pulse; no. of positioning data: 600/axis; max. output pulse: 1 Mpps; 40-pin connector
		QD75D4	4 axes; 2-/3-/4-axis linear interpolation, 2-axis circular interpolation; control unit: mm, inch, degree, pulse; no. of positioning data: 600/axis; max. output pulse: 1 Mpps; 40-pin connector
		QD70D4	4 axes, control unit: pulse, no. of positioning data: 10/axis, max. output pulse: 4 Mpps, 40-pin connector
		QD70D8	8 axes, control unit: pulse, no. of positioning data: 10/axis, max. output pulse: 4 Mpps, 40-pin connector
	With SSCNET connectivity (Note 2)	QD75M1	1 axis; control unit: mm, inch, degree, pulse; no. of positioning data: 600/axis; 40-pin connector
		QD75M2	2 axes; 2-axis linear interpolation, 2-axis circular interpolation; control unit: mm, inch, degree, pulse; no. of positioning data: 600/axis; 40-pin connector
	With SSCNET III connectivity (Note 2)	QD75M4	4 axes; 2-/3-/4-axis linear interpolation, 2-axis circular interpolation; control unit: mm, inch, degree, pulse; no. of positioning data: 600/axis; 40-pin connector
		QD75MH1	1 axis; control unit: mm, inch, degree, pulse; no. of positioning data: 600/axis; 40-pin connector; with SSCNET III connectivity
		QD75MH2	2 axes; 2-axis linear interpolation, 2-axis circular interpolation; control unit: mm, inch, degree, pulse; no. of positioning data: 600/axis; 40-pin connector; with SSCNET III connectivity
	Open collector output with built-in counter function (Note 4)	QD75MH4	4 axes; 2-/3-/4-axis linear interpolation, 2-axis circular interpolation; control unit: mm, inch, degree, pulse; no. of positioning data: 600/axis; 40-pin connector; with SSCNET III connectivity
		QD72P3C3	Positioning: 3 axes, control unit: pulse, no. of positioning data: 1/axis, max. output pulse: 100 kpps, counter: 3 channels, 100 kpps, count input signal: 5/24 V DC, 40-pin connector

Information module

MES interface		QJ71MES96	MES interface module *MX MESInterface and CompactFlash card are required.
	Option	GT05-MEM-128MC	128 MB CompactFlash card
		GT05-MEM-256MC	256 MB CompactFlash card
Ethernet		QJ71E71-100	10BASE-T/100BASE-TX
		QJ71E71-B2	10BASE2
		QJ71E71-B5	10BASE5
Serial communication		QJ71C24N	RS-232: 1 channel, RS-422/485: 1 channel, total transmission speed of 2 channels: 230.4 kbps
		QJ71C24N-R2	RS-232: 2 channels, total transmission speed of 2 channels: 230.4 kbps
		QJ71C24N-R4	RS-422/485: 2 channels, total transmission speed of 2 channels: 230.4 kbps
Intelligent communication		QD51	BASIC program execution module, RS-232: 2 channels
		QD51-R24	BASIC program execution module, RS-232: 1 channel, RS-422/485: 1 channel
		SW□IVD-AD51HP (Note 6)	Software package for QD51, AD51H-S3, and A1SD51S

Control network module

CC-Link IE Controller Network		QJ71GP21-SX	Multi-mode fiber optic cable, dual loop, controller network (control/normal station)
		QJ71GP21S-SX	Multi-mode fiber optic cable, dual loop, controller network (control/normal station), with external power supply function
MELSECNET/H	SI/QSI fiber optic cable	QJ71LP21-25	SI/QSI/H-PCF/ broadband H-PCF fiber optic cable, dual loop, controller network (control/normal station) or remote I/O network (remote mater station)
		QJ71LP21S-25	SI/QSI/H-PCF/ broadband H-PCF fiber optic cable, dual loop, controller network (control/normal station) or remote I/O network (remote mater station), with external power supply function
		QJ72LP25-25	SI/QSI/H-PCF/ broadband H-PCF fiber optic cable, dual loop, remote I/O network (remote I/O station)
	GI-50/125 fiber optic cable	QJ71LP21G	GI-50/125 fiber optic cable, dual loop, controller network (control/normal station) or remote I/O network (remote master station)
		QJ72LP25G	GI-50/125 fiber optic cable, dual loop, remote I/O network (remote I/O station)
	GI-62.5/125 fiber optic cable	QJ71LP21GE	GI-62.5/125 fiber optic cable, dual loop, controller network (control/normal station) or remote I/O network (remote master station)
		QJ72LP25GE	GI-62.5/125 fiber optic cable, dual loop, remote I/O network (remote I/O station)
	Coaxial cable	QJ71BR11	3C-2V/5C-2V coaxial cable, single bus, controller network (control/normal station) or remote I/O network (remote master station)
		QJ72BR15	3C-2V/5C-2V coaxial cable, single bus, remote I/O network (remote I/O station)
	CC-Link		QJ61BT11N
CC-Link/LT		QJ61CL12	Master station
FL-net (OPCN-2)	Ver. 2	QJ71FL71-T-F01	10BASE-T, 100BASE-TX
		QJ71FL71-B2-F01	10BASE-2
		QJ71FL71-B5-F01	10BASE-5
	Ver. 1	QJ71FL71-T	10BASE-T
		QJ71FL71-B2	10BASE-2
		QJ71FL71-B5	10BASE-5
AS-i		QJ71AS92	Master station, AS-Interface Specification Version 2.11 compatible

PC interface board

Product	Model	Outline	
CC-Link IE Controller Network	Q80BD-J71GP21-SX	PCI bus, Japanese/English OS compatible, multi-mode fiber optic cable, dual loop, controller network (control/normal station)	
	Q80BD-J71GP21S-SX	PCI bus, Japanese/English OS compatible, multi-mode fiber optic cable, dual loop, controller network (control/normal station), with external power supply function	
MELSECNET/H (10)	SI/QSI fiber optic cable	Q81BD-J71LP21-25 NEW	PCI Express bus, Japanese/English OS compatible, multi-mode fiber optic cable, dual loop, controller network (control/normal station)
		Q80BD-J71LP21-25	PCI bus, Japanese/English OS compatible, SI/QSI/H-PCF/broadband H-PCF fiber optic cable, dual loop, controller network (control/normal station)
		Q80BD-J71LP21S-25	PCI bus, Japanese/English OS compatible, SI/QSI/H-PCF/broadband H-PCF fiber optic cable, dual loop, controller network (control/normal station), with external power supply function
	GI-50/125 fiber optic cable	Q80BD-J71LP21G	PCI bus, Japanese/English OS compatible, GI-50/125 fiber optic cable, dual loop, controller network (control/normal station)
		Q80BD-J71LP21GE	PCI bus, Japanese/English OS compatible, GI-62.5/125 fiber optic cable, dual loop, controller network (control/normal station)
	Coaxial cable	Q80BD-J71BR11	PCI bus, Japanese/English OS compatible, 3C-2V/5C-2V coaxial cable, single bus, controller network (control/normal station)
Q81BD-J61BT11 NEW		PCI Express bus, Japanese/English OS compatible, master/local interface board, CC-Link Ver. 2 compatible	
CC-Link	Q80BD-J61BT11N	PCI bus, Japanese/English OS compatible, master/local interface board, CC-Link Ver. 2 compatible	

MELSOFT GX Series

GX Developer	SW□D5C-GPPW-E	MELSEC programmable controller programming software
	SW□D5C-GPPW-EV	MELSEC programmable controller programming software (upgrade)
GX Configurator-AD	SW□D5C-QADU-E	MELSEC-Q dedicated analog to digital conversion module setting/monitoring tool
GX Configurator-DA	SW□D5C-QDAU-E	MELSEC-Q dedicated digital to analog conversion module setting/monitoring tool
GX Configurator-SC	SW□D5C-QSCU-E	MELSEC-Q dedicated serial communication module setting/monitoring tool
GX Configurator-CT	SW□D5C-QCTU-E	MELSEC-Q dedicated high-speed counter module setting/monitoring tool
GX Configurator-TC	SW□D5C-QTCU-E	MELSEC-Q dedicated temperature control module setting/monitoring tool
GX Configurator-TI	SW□D5C-QTIU-E	MELSEC-Q dedicated temperature input module setting/monitoring tool
GX Configurator-FL	SW□D5C-QFLU-E	MELSEC-Q dedicated FL-net module setting/monitoring tool
GX Configurator-PT	SW□D5C-QPTU-E	MELSEC-Q dedicated positioning module QD70 setting/monitoring tool
GX Configurator-AS	SW□D5C-QASU-E	MELSEC-Q dedicated AS-i master module setting/monitoring tool
GX Configurator-QP	SW□D5C-QD75P-E	MELSEC-Q dedicated positioning module QD75P/D/M setting/monitoring tool

MELSOFT MX Series

MX Component	SW□D5C-ACT-E	ActiveX library for communication
MX Sheet	SW□D5C-SHEET-E	Excel communication support tool
MX MESInterface	SW1DNC-MESIF-E	MES interface module QJ71MES96 dedicated information linkage tool
MX Works	SW□D5C-SHEETSET-E	A set of two products: MX Component, MX Sheet

Note 1) "Positive common" means using the module by connecting the common terminal to positive DC power; "negative common" means using the module by connecting the common terminal to negative DC power.

Note 2) The connector is not enclosed. Prepare A6CON1, A6CON2, A6CON3, or A6CON4 separately.

Note 3) The connector is not enclosed. Prepare A6CON1E, A6CON2E, or A6CON3E separately.

Note 4) The connector is not enclosed. Prepare A6CON1, A6CON2, or A6CON4 separately.

Note 5) The connector is not enclosed. Prepare A6CON4 separately.

Note 6) Runs in Windows command prompt.

Note 7) Depending on the combination of the power supply module and base unit, the mounting position (slot) of Q68TD-G-H01 is restricted. Refer to the manual for more details.

Note 8) If the shipping standard compliance is required, select the Q64P model.

Mitsubishi Programmable Controllers

Precautions for Choosing the Products

This publication explains the typical features and functions of the Q Series programmable controllers and does not provide restrictions and other information on usage and module combinations. When using the products, always read the user's manuals of the products.

Mitsubishi will not be held liable for damage caused by factors found not to be the cause of Mitsubishi; opportunity loss or lost profits caused by faults in the Mitsubishi products; damage, secondary damage, accident compensation caused by special factors unpredictable by Mitsubishi; damages to products other than Mitsubishi products; and to other duties.

⚠ For safe use

- To use the products given in this publication properly, always read the "manuals" before starting to use them.
- The products have been manufactured as general-purpose parts for general industries, and have not been designed or manufactured to be incorporated in a device or system used in purposes related to human life.
- Before using the products for special purposes such as nuclear power, electric power, aerospace, medicine or passenger movement vehicles, consult with Mitsubishi.
- The products have been manufactured under strict quality control. However, when installing the products where major accidents or losses could occur if the products fail, install appropriate backup or failsafe functions in the system.

Country/Region	Sales office	Tel/Fax
USA	Mitsubishi Electric Automation Inc. 500 Corporate Woods Parkway, Vernon Hills, IL 60061, USA	Tel: +1-847-478-2100 Fax: +1-847-478-0327
Brazil	MELCO-TEC Rep. Com.e Assessoria Tecnica Ltda. Av Paulista, 1439-Cj. 72 Cerqueira Cesar CEP 01311-200, Sao Paulo, SP, CEP: 01311-200, Brazil	Tel: +55-11-3146-2200 Fax: +55-11-3146-2217
Germany	Mitsubishi Electric Europe B.V. German Branch Gothaer Strasse 8, D-40880 Ratingen, Germany	Tel: +49-2102-486-0 Fax: +49-2102-486-1120
UK	Mitsubishi Electric Europe B.V. UK Branch Travellers Lane, Hatfield, Hertfordshire, AL10 8XB, UK	Tel: +44-1707-276100 Fax: +44-1707-278992
Italy	Mitsubishi Electric Europe B.V. Italy Branch Viale Colleoni 7-20041 Agrate Brianza (Milano), Italy	Tel: +39-039-60531 Fax: +39-039-6053312
Spain	Mitsubishi Electric Europe B.V. Spanish Branch Carretera de Rubi 76-80 E-08190 Sant Cugat del Valles (Barcelona), Spain	Tel: +34-93-565-3131 Fax: +34-93-589-1579
France	Mitsubishi Electric Europe B.V. French Branch 25, Boulevard des Bouvets, F-92741 Nanterre Cedex, France	Tel: +33-1-5568-5568 Fax: +33-1-5568-5757
South Africa	Circuit Breaker Industries Ltd. Private Bag 2016, ZA-1600 Isando, South Africa	Tel: +27-11-928-2000 Fax: +27-11-392-2354
Hong Kong	Mitsubishi Electric Automation (Hong Kong) Ltd. 10/F, Manulife Tower, 169 Electric Road, North Point, Hong Kong	Tel: +852-2887-8870 Fax: +852-2887-7984
China	Mitsubishi Electric Automation (Shanghai) Ltd. 17/F Chong Hing Finance Center, No.288 West Nanjing Road, Shanghai 200003, China	Tel: +86-21-2322-3030 Fax: +86-21-2322-3000
Taiwan	Setsuyo Enterprise Co., Ltd. 6F, No.105 Wu-Kung 3rd Rd, Wu-Ku Hsiang, Taipei Hsien 248, Taiwan	Tel: +886-2-2299-2499 Fax: +886-2-2299-2509
Korea	Mitsubishi Electric Automation Korea Co., Ltd. 1480-6, Gayang-dong, Gangseo-ku, Seoul 157-200, Korea	Tel: +82-2-3660-9552 Fax: +82-2-3664-8372
Singapore	Mitsubishi Electric Asia Pte, Ltd. 307 Alexandra Road #05-01/02, Mitsubishi Electric Building Singapore 159943	Tel: +65-6470-2460 Fax: +65-6476-7439
Thailand	Mitsubishi Electric Automation (Thailand) Co., Ltd. Bang-Chan Industrial Estate No.111 Soi Serithai 54, T.Kannayao, A.Kannayao, Bangkok 10230 Thailand	Tel: +66-2-517-1326 Fax: +66-2-517-3239
Indonesia	P.T. Autoteknindo Sumber Makmur Muara Karang Selatan Block A/Utara No.1 Kav. No.11, Kawasan Industri Pergudangan, Jakarta - Utara 14440, P.O. Box 5045 Jakarta 11050, Indonesia	Tel: +62-21-663-0833 Fax: +62-21-663-0832
India	Messung Systems Pvt., Ltd. Electronic Sadan NO: III Unit No.15, M.I.D.C. Bhosari, Pune-411026, India	Tel: +91-20-2712-3130 Fax: +91-20-2712-8108
Australia	Mitsubishi Electric Australia Pty. Ltd. 348 Victoria Road, Rydalmere, N.S.W. 2116, Australia	Tel: +61-2-9684-7777 Fax: +61-2-9684-7245



HEAD OFFICE: TOKYO BUILDING, 2-7-3, MARUNOUCHI, CHIYODA-KU, TOKYO 100-8310, JAPAN
NAGOYA WORKS: 1-14, YADA-MINAMI 5, HIGASHI-KU, NAGOYA, JAPAN